
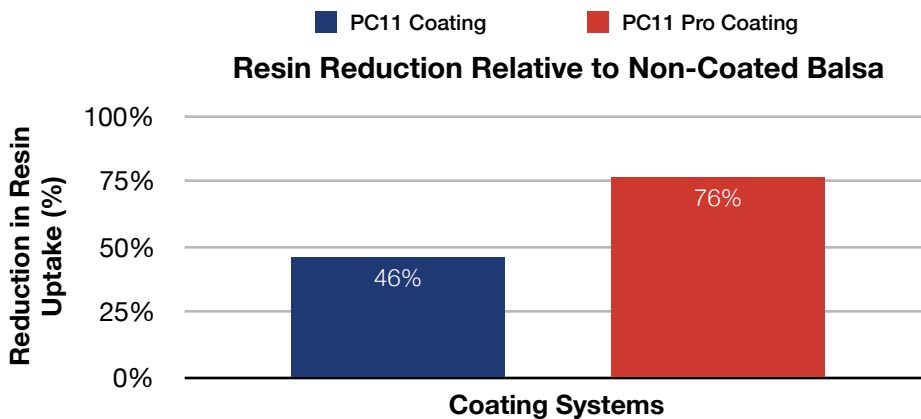


Minimizing Resin Absorption of BALSASUD® Core

Balsa core resin uptake was compared for the standard **PC11 formulation**, and for the newly developed **PC11 Pro formulation** against non-coated balsa. BALSASUD® Core was UV coated with **PC11 Pro** coating and then vacuum infused.

The results show as expected: that the new **PC11 Pro formulation** achieves **significantly lower** resin uptake compared to the standard formulation.

Balsa sheets in 1220 x 610 x 15 mm were used for all resin uptake testing. The balsa sheets were not cut from the same block and the balsa sheet density ranged from 154-174 kg/m³ for the samples used.

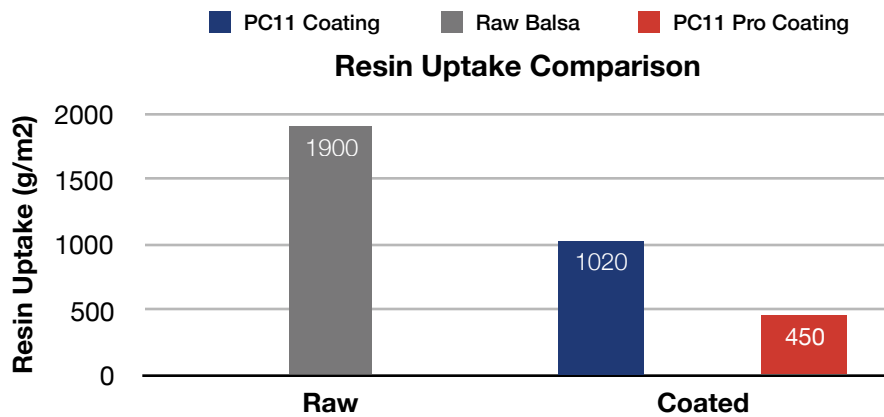

USA - Florida
1060 E. 30 St.
Miami, FL 33013, USA
T +1 (305) 921-4292
F +1 (305) 691-9094

USA - Texas
5101 Norwood Road
Dallas, TX 75247, USA
T +1 (214) 905-4359
F +1 (214) 905-4365

Ecuador
Km. 24 Via Daule
Guayaquil, Ecuador
T +593 4-226-7008
F +593 4-226-7007

Europe
Via Enrico Fermi, 170
46011 – Acquanegra s/C (MN), Italy
T +39 3398 107391
F +39 0376 727248