


Minimizing Resin Absorption of BALSASUD® Core

Balsa core resin uptake was compared for the standard **PC11 formulation**, and for the newly developed **PC11 Pro formulation** against non-coated balsa. BALSASUD® Core was UV coated with **PC11 Pro** coating and then vacuum infused.

The results show as expected: that the new **PC11 Pro formulation** achieves **significantly lower** resin uptake compared to the standard formulation.

Balsa sheets in 1220 x 610 x 15 mm were used for all resin uptake testing. The balsa sheets were not cut from the same block and the balsa sheet density ranged from 154-174 kg/m³ for the samples used.

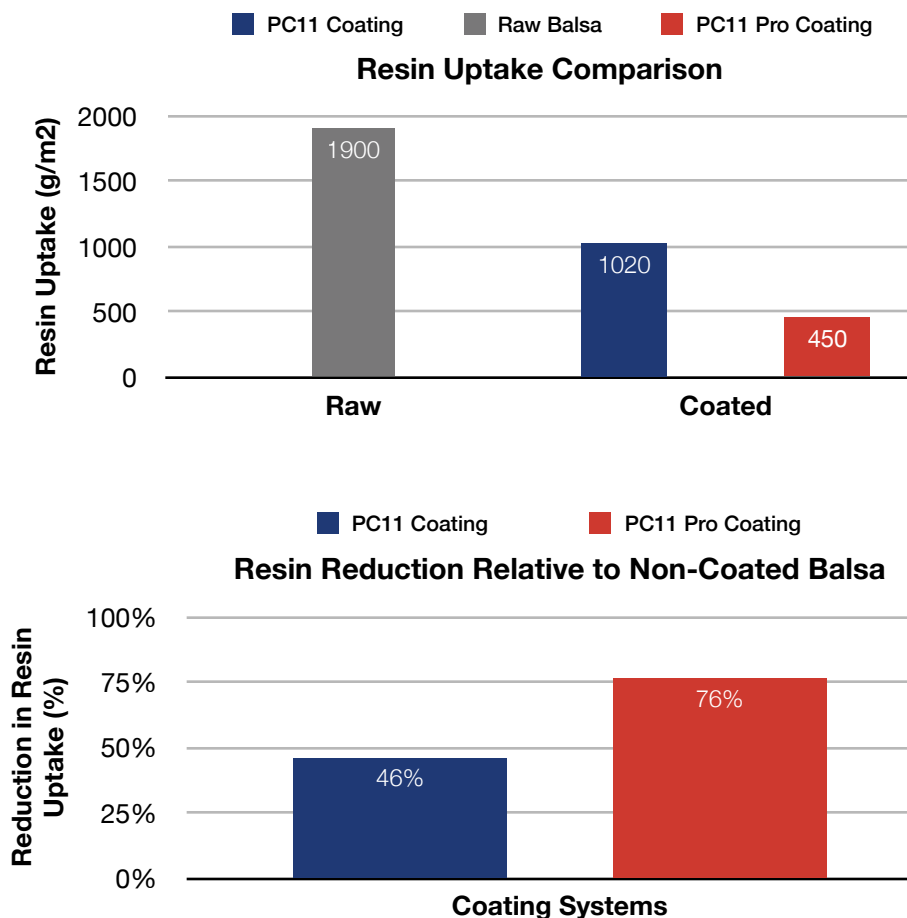

Asia
2/F Leader CTR 37 Wong Chuk
Hang Rd Aberdeen
Hong Kong
T +852 8193 3434

North America
1060 E. 30 St.
Miami, FL 33013
USA
T +1 (305) 921-4292

South America
Km. 24 Via Daule
Guayaquil
Ecuador
T +593 4-226-7008

Europe
Via Enrico Fermi, 170
46011 – Acquanegra s/C (MN)
Italy
T +39 3398 107391